



The PBC panels can be used for both roof and wall applications. PBC panels are attached to a building structure with exposed fasteners. The PBC panel is often used in horizontal applications on walls.

FEATURES AND BENEFITS

- UL 790 external fire rating is available.

PRODUCT SPECIFICATIONS

Applications: Roof and Wall

Coverage Widths: 32"

Rib Spacing: 2.67" on center

Rib Height: 7/8"



Minimum Slope: 3:12

Panel Attachment: Exposed Fastening System

Gauges: 26 (Standard); 29, 24, 22 (Optional)

Finishes: Smooth (standard); Embossed (optional)

Coatings: Galvalume Plus®, Signature® 200, Signature® 300

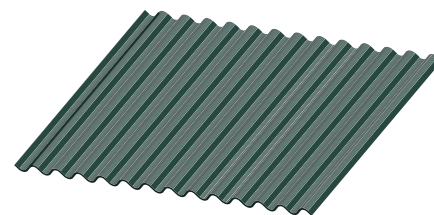



CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
STRUCTURAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section